



High-Sensitive Unipolar Hall Effect Switch CYD421

Applications

- Automotive brake pedal position detection
- Proximity detection
- Speed measurement
- Weak magnetic field applications
- Solid state switches etc.

Features

- 3.8V to 40V operation voltage
- Overvoltage protection capability up to 40 V
- High accuracy unipolar switch
- Built-in dynamic offset cancellation
- Open drain output
- Low thermal drift of magnetic sensing
- Qualified according to AEC-Q100 test standard

Order Information

- CYD421-PA
Package (PA): UA, LH


Package Type

P/N: CYD421-XX

TO92S (UA)



SOT23 (LH)



Specifications

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Conditions	Rating	Unit
Maximum supply voltage	V_{DDMAX}		60	V
Reverse voltage	$-V_{DDMAX}$		-60	V
Operating temperature	T_A		-40~+125	$^{\circ}\text{C}$
Storage temperature	T_S		-40~+165	$^{\circ}\text{C}$
Maximum output sink current	I_{OMAX}		40	mA

Electrical Characteristics ($T_A=25^{\circ}\text{C}$, $V_{DD}=5\text{VDC}$)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Supply voltage	V_{DD}		3.8		40	V
Saturation voltage output	$V_{OL(ON)}$	@ $I_{OUT} = 20\text{mA}$			0.4	V
Output leakage current	I_{OH}	Output switch off			10	μA
Supply current	I_{DD}	Output open		6	9	mA
Output voltage fall time	t_f	$R_L=1\text{k}\Omega$;			1.5	μs
Output voltage rise time	t_r	$C_L=20\text{pF}$			1	μs

Magnetic Characteristics ($T_A=25^{\circ}\text{C}$, $V_{DD}=5\text{VDC}$)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating point	B_{OP}	Pullup resistor $R_L=1\text{k}\Omega$,	30	60	80	G
Release point	B_{RP}	Load capacitor $C_L=20\text{pF}$	10	40	60	G
Hysteresis	B_{HYS}		10	20	40	G




General Specifications

CYD421, unipolar Hall effect switch, designed with Bipolar technology, is south sensitive unipolar Hall Effect switch and includes on-chip Hall element voltage generator, a voltage regulator for operation with supply voltages of 3.8 to 40V, reverse voltage protection, temperature compensation circuitry, small-signal amplifier, Schmitt trigger and an open-collector output.


The sensor is designed to respond to South poles. While the magnetic flux density(B) is larger than operate point B_{op} , the output will be turned on with low output level. Then the output is held until the magnetic flux (B) is lower than release point B_{rp} . The output will be turned off with high output level.

CYD421 offers a variety of packages, including TO92S, SOT23. All packages are RoHS compliant.


The architecture block diagram is shown in Fig. 1.

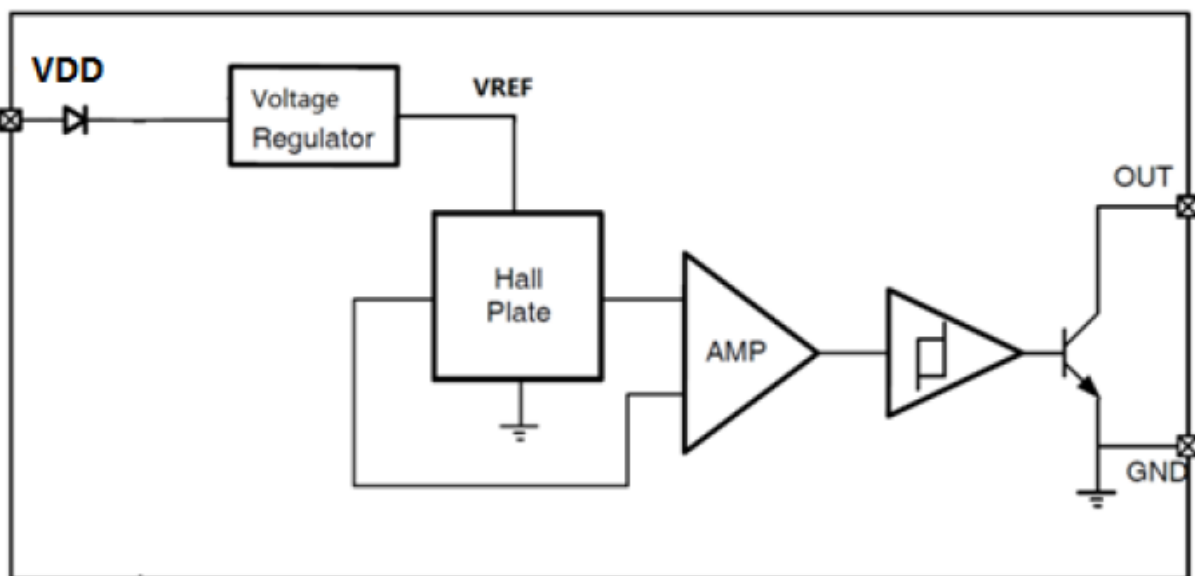

Application Circuits

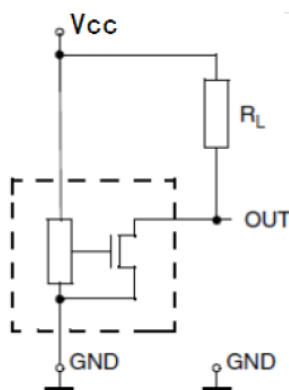

Circuit 1

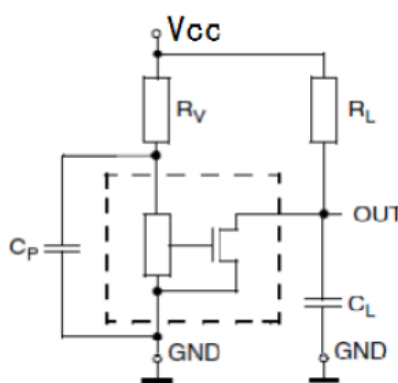

Circuit 2


For applications with disturbances on the supply line or radiated disturbances, a series resistor R_V and two capacitors C_P and C_L , all placed close to the sensor, are recommended.

For example:
 $R_V = 100\Omega$
 $C_P = 4.7\text{ nF}$
 $C_L = 1\text{ nF}$
 $R_L = 1\text{ k}\sim 10\text{ k}\Omega$




Application Example

A positive magnetic field is defined as a South Pole near to the marked side of the TO92S package. For the SOT23 package the positive magnetic field is defined as a North Pole near to the marked side.

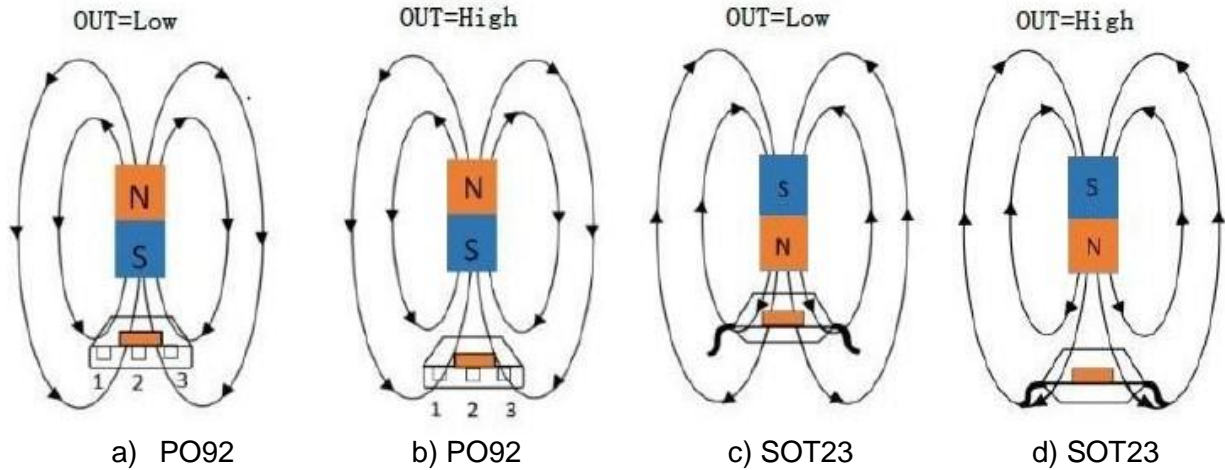

Output is low at a small sensing distance between magnet and sensor, for case a) and c)
Output is high at a large sensing distance between magnet and sensor, for case b) and d)

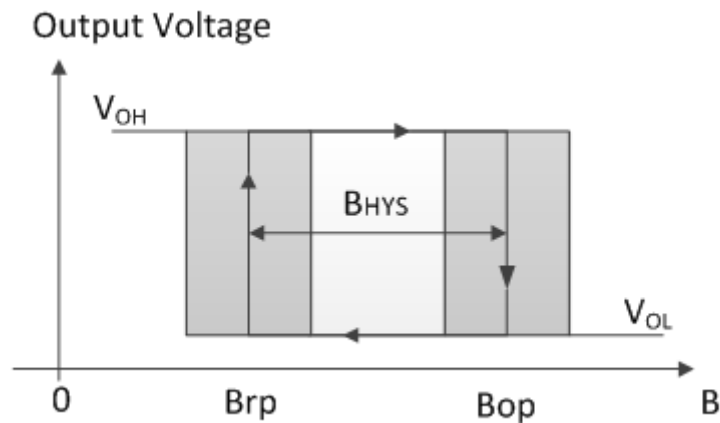

Output behavior of CYD421

ESD Test

The output pin has to be in tri-state (high impedance) for ESD measurements

Symbol	Parameter	Min	Max	Unit
V_{HBM}	Human body model (according to AEC Q100-002)	-4	4	kV




Package Outline

T092S (UA)


(Packing: bulk, 1000pcs/bag)

Pin Assignment

Pin No.	Name	Function
1	Vcc	Power supply
2	GND	Ground
3	Vout	Output

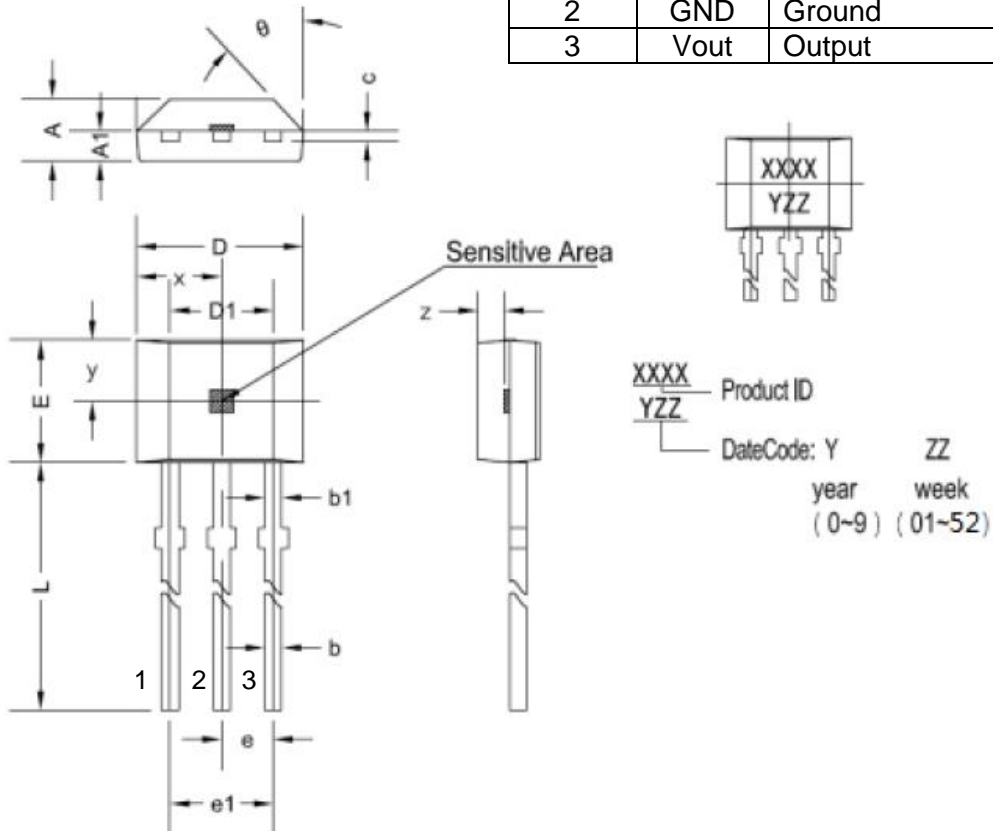

Symbol	Size (mm)		Size (in inches)	
	Min.	Max.	Min.	Max.
A	1.42	1.67	0.056	0.066
A1	0.66	0.86	0.026	0.034
b	0.35	0.56	0.014	0.022
b1	0.40	0.55	0.016	0.022
C	0.36	0.51	0.014	0.020
D	3.90	4.20	0.154	0.165
D1	2.97	3.27	0.117	0.129
E	2.90	3.28	0.114	0.129
e	1.27 typ.		0.050 typ.	
e1	2.44	2.64	0.096	0.104
L	13.5	15.5	0.531	0.610
x	2.03 typ.		0.080 typ.	
y	1.55 typ.		0.061 typ.	
z	0.50 typ.		0.020 typ.	
θ	45° typ.		45° typ.	




Package Outline
SOT23(LH)

(Packing: Tape&Reel, 3000pcs/reel)

Pin Assignment

Pin No.	Name	Function
1	Vcc	Power supply
2	GND	Ground
3	Vout	Output

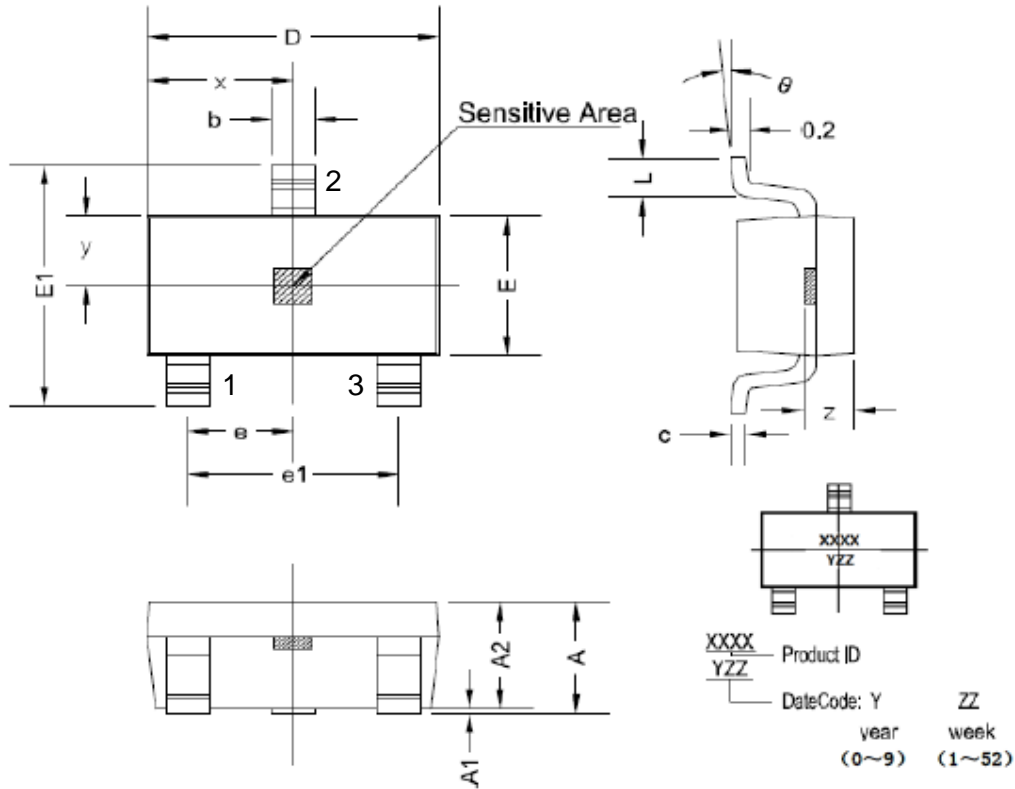

Symbol	Size (mm)		Size (in inches)	
	Min.	Max.	Min.	Max.
A	1.05	1.25	0.041	0.049
A1	0	0.10	0	0.004
A2	1.05	1.15	0.041	0.045
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.82	3.02	0.111	0.119
E	1.50	1.70	0.059	0.067
E1	2.65	2.95	0.104	0.116
e	0.95 typ.		0.037 typ.	
e1	1.80	2.00	0.071	0.079
L	0.30	0.60	0.012	0.024
x	1.46 typ.		0.057 typ.	
y	0.80 typ.		0.032 typ.	
z	0.60 typ.		0.024 typ.	
θ	0°	8°	0°	8°