



Open Loop Hall Current Sensor CYHCS-F

This Hall Effect current sensor is based on open loop compensating principle and designed with a high galvanic isolation between primary and secondary circuits. It can be used for measurement of DC and AC current, pulse currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none"> • Excellent accuracy • Very good linearity • Light in weight • Less power consumption • Window structure • Electrically isolating the output of the transducer from the current carrying conductor • No insertion loss • Current overload capability 	<ul style="list-style-type: none"> • Frequency conversion timing equipments • Various power supply • Uninterruptible power supplies (UPS) • Electric welding machines • Transformer substation • Numerical controlled machine tools • Electric powered locomotive • Microcomputer monitoring • Electric power network monitoring

Electrical Data

Primary Nominal RMS Current I_r (A)	Measuring Range (A)	Output voltage (V)	Aperture Diameter (mm)	Part number
200	600	4 ±1.0%	41x14	CYHCS-F200A
400	1200			CYHCS-F400A
600	1200			CYHCS-F600A
800	1600			CYHCS-F800A
1000	2000			CYHCS-F1000A
2000	3000			CYHCS-F2000A


Supply Voltage
Current Consumption
Galvanic isolation, 50/60Hz, 1min:
Load resistance:
Isolation resistance @ 500 VDC

$V_{cc} = \pm 15V \pm 5\%$,
 $I_c < 20mA$
5kV
10k Ω
> 500 M Ω

Accuracy and Dynamic performance data

Accuracy at I_r , $T_A=25^\circ C$ (without offset),
Linearity from 0 to I_r , $T_A=25^\circ C$,
Electric Offset Voltage, $T_A=25^\circ C$,
Magnetic Offset Voltage ($I_r \rightarrow 0$)
Thermal Drift of Offset Voltage,
Thermal Drift (-10 $^\circ C$ to 50 $^\circ C$),
Frequency bandwidth (- 3 dB):
Response Time at 90% of I_P ($f=1k$ Hz)

$X < 1.0\%$
 $E_L < 1.0\%$ FS
 $V_{oe} < 15mV$
 $V_{om} < \pm 30mV$
 $V_{ot} < \pm 0.5mV/^\circ C$
T.C. < $\pm 0.1\%$ / $^\circ C$
DC-50kHz
 $t_r < 5\mu s$




General Data

Ambient Operating Temperature,
Ambient Storage Temperature,

$T_A = -40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 $T_S = -55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Dimensions

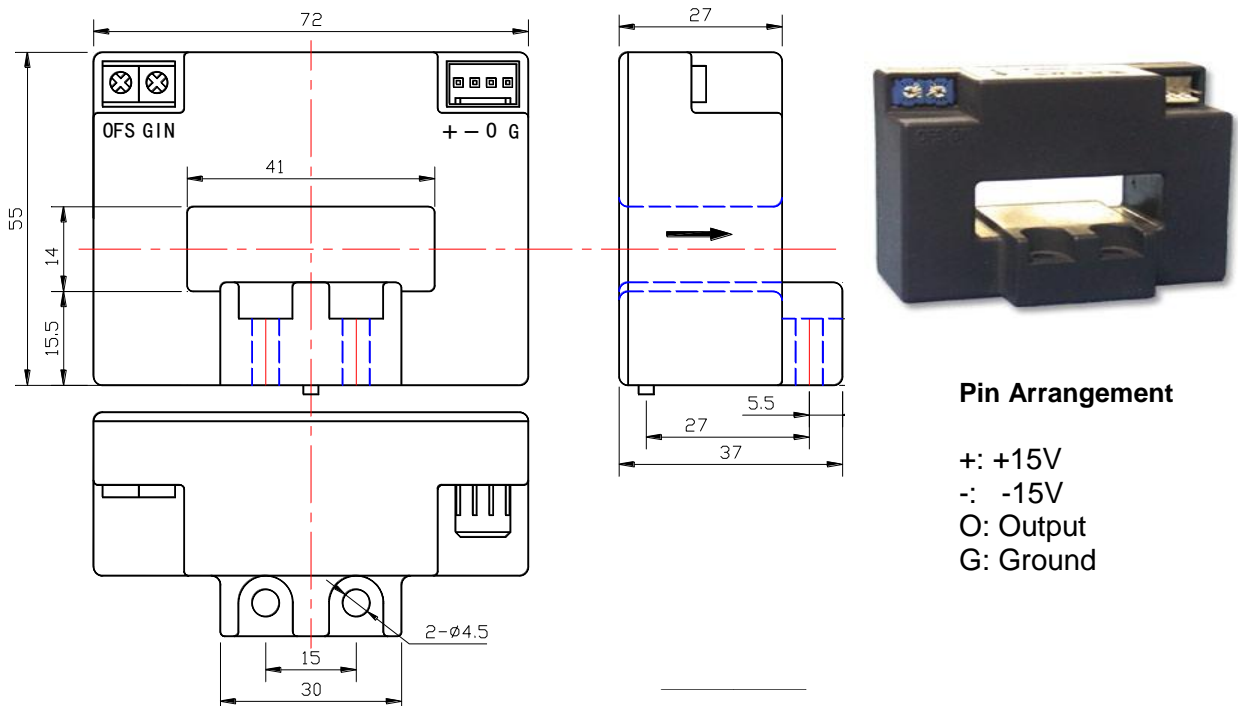

Pin Arrangement

+: +15V
-: -15V
O: Output
G: Ground

Notes:

1. Connect the terminals of power source, outputs respectively and correctly, never make wrong connection.
2. Two potentiometers can be adjusted, only if necessary, by turning slowly to the required accuracy with a small screwdriver.
3. The best accuracy can be achieved when the window is fully filled with bus-bar (current carrying conductor).
4. The in-phase output can be obtained when the direction of current of current carrying conductor is the same as the direction of arrow marked on the transducer